


Backwater chamber LW 1000 Inlet DN 150, Outlet DN 200, 2180 mm

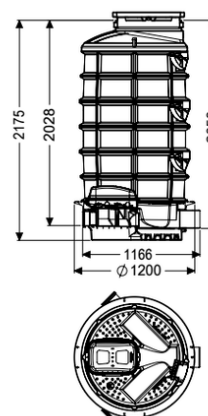

Article information

Item no.: 882005
GTIN: 4026092049273
Price group: 60

Advantages

- Komfort: expensive living or useful space is not lost
- No system noises or unpleasant odours and soiling in the building
- Simple installation thanks to low weight of the chamber components

Description

The backwater chamber with monolithic structure is equipped with access steps, three inlets, an open channel passage and an integrated Controfix clean out. Thanks to the modular KESSEL system, the clean out can easily be converted to a Staufix SWA Premium backwater valve, Staufix FKA or Pumpfix F backwater pumping station. The temporary protective cover made of polymer can be used as a cover in the green area or be replaced by an optional upper section with cover plate in accordance with EN 124. The optional upper section makes a variable installation depth possible. Watertight – suitable for aggressive wastewater – 20-year warranty for the system tank.

Variant

Sound absorption mat:

Standard chamber system

General characteristics

Colour:

stone grey

Type of wastewater:

with sewage

Delivery state:

Installation-ready (connection parts must be connected on site)

Inlet max. scoring (DN):

Z-42.1-333

Dimensions

Net weight:

120,5 kg

| | |
|--|---|
| Gross weight: | 130 kg |
| Groundwater resistant from lower edge of base section: | 2000 mm |
| Vertical drop between inlet and outlet: | 9 mm |
| Installation depth: | 2230 - 2460 mm |
| Packaging dimension: | length |
| Packaging dimension: | width |
| Packaging dimension: | height |
| | |
| Tank/drain body | |
| Channel: | open channel passage, with inlets right and left, 45 degrees |
| Chamber system: | 2180 mm |
| Tank width max.: | 1250 mm |
| Distance pipe bottom outlet to tank bottom: | 108 mm |
| Distance pipe bottom inlet to tank bottom: | 136 mm |
| Number of outlets: | 1 |
| Outlet nominal size (DN): | 200 mm |
| Inlet nominal size (DN): | 150 mm |
| Inlet type: | 3 |
| Connection inlet/outlet sockets: | with spigot for connection for wastewater pipes and shaped parts in accordance with DIN EN 1401-1, DIN 19534, DIN EN 12666-1, DIN 19537-3 and DIN EN 1852-1 |
| | |
| Clear width of tank (LW): | 1000 mm |
| Clear width of entry (LW): | 600 mm |
| | |
| Coverage features | |
| Type of cover: | Temporary protective cover |
| Cover material: | Polymer |